

FCS-4057

3MP 30× Network Speed Dome



FCS-4057 3MP 30× Network Speed Dome adopts 1/2.8" progressive scan CMOS chip. With the 30× optical zoom lens, the camera offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as the rivers, roads, railways, airports, squares, parks, scenic spots, and venues, etc.

Key Features

- 1/2.8" progressive scan CMOS
- Up to 2048 × 1536@30fps resolution
- Min. illumination:
Color: 0.005 Lux @(F1.6, AGC ON)
B/W: 0.001 Lux @(F1.6, AGC ON)
- 30× optical zoom, 16× digital zoom
- WDR, HLC, BLC, 3D DNR, Defog, EIS, Regional Exposure, Regional Focus
- 24 VAC & Hi-PoE
- Support H.265+/H.265 video compression

Specification


| Camera Module | |
|-----------------------|---|
| Image Sensor | 1/2.8" progressive scan CMOS |
| Min. Illumination | Color: 0.005 Lux @(F1.6, AGC ON) B/W: 0.001Lux @(F1.6, AGC ON) |
| White Balance | Auto/Manual/ATW (Auto-tracking White Balance)/Indoor/Outdoor/Fluorescent Lamp/Sodium Lamp |
| Gain | Auto/Manual |
| Shutter Time | 50Hz: 1/1 s to 1/30,000 s 60Hz: 1/1 s to 1/30,000 s |
| Day & Night | IR Cut Filter |
| Digital Zoom | 16× |
| Privacy Mask | 24 programmable privacy masks |
| Focus Mode | Auto/Semi-automatic/Manual |
| WDR | 120 dB WDR |
| Lens | |
| Focal Length | 4.5 mm to 135 mm, 30× optical zoom |
| Zoom Speed | Approx. 4.1 s (optical lens, wide-tele) |
| Field of View | Horizontal field of view: 57.2° to 2.2° (Wide-Tele) Vertical field of view: 44.4° to 1.6° (Wide-Tele) Diagonal field of view: 68.5° to 2.7° (Wide-Tele) |
| Working Distance | 10 mm to 1500 mm (wide-tele) |
| Aperture Range | F1.6 to F4.4 |
| PTZ | |
| Movement Range (Pan) | 360° endless |
| Pan Speed | Configurable, from 0.1°/s to 250°/s, Preset speed: 300°/s |
| Movement Range (Tilt) | From -5° to 90° (auto-flip) |
| Tilt Speed | Configurable, from 0.1°/s to 150°/s Preset Speed: 200°/s |
| Proportional Zoom | Support |
| Presets | 300 |
| Patrol Scan | 8 patrols, up to 32 presets for each patrol |
| Pattern Scan | 4 pattern scans, record time over 10 minutes for each scan |
| Power-off Memory | Support |
| Park Action | Preset/Pattern Scan/Patrol Scan/Auto Scan/Tilt Scan/Random Scan/Frame Scan/Panorama Scan |
| 3D Positioning | Support |
| PTZ Position Display | Support |
| Preset Freezing | Support |
| Scheduled Task | Preset/Pattern Scan/Patrol Scan/Auto Scan/Tilt Scan/Random Scan/Frame Scan/Panorama Scan/Dome Reboot/Dome Adjust/Aux Output |
| Compression Standard | |
| Video Compression | Main Stream: H.265+/H.265/H.264+/H.264 Sub-stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPEG |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| H.264+ | Support |
| H.265 Type | Baseline Profile/Main Profile/High Profile |
| H.265+ | Support |
| Video Bitrate | 32 Kbps to 16384 Kbps |

| | |
|------------------------|--|
| Audio Compression | G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2/PCM |
| Audio Bitrate | G.711alaw/G.711ulaw: 64 Kbps G.722.1/G.726: 16 Kbps MP212/PCM: 32 Kbps/64 Kbps/128 Kbps |
| SVC | Support |
| Smart Features | |
| Basic Event | Motion Detection, Alarm Input, Alarm Output, Video Tampering Detection, Exception |
| Smart Event | Face Detection, Intrusion Detection, Line Crossing Detection, Region Entrance Detection, Region Exiting Detection, Object Removal Detection, Unattended Baggage Detection |
| Smart Record | ANR (Automatic Network Replenishment), Dual-VCA |
| ROI | Main stream, sub-stream, and third stream respectively support four fixed areas. |
| Auto-Tracking | Support |
| Image | |
| Max. Resolution | 2048 × 1536 |
| Main Stream | 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720) |
| Sub-Stream | 50Hz: 25fps (704 × 576, 640 × 480, 352 × 288) 60Hz: 30fps (704 × 480, 640 × 480, 352 × 240) |
| Third Stream | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240) |
| Image Enhancement | HLC/BLC/3D DNR/Defog/EIS/Regional Exposure/Regional Focus |
| Network | |
| Network Storage | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/CIFS), ANR |
| Alarm Linkage | Alarm actions, such as Notify Surveillance Center, Upload to FTP, Send Email, Trigger Recording, Recording Linkage, and Alarm Input, etc. |
| Protocols | IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, Bonjour |
| API | Open-ended, support ONVIF, ISAPI, and CGI, support HIKVISION SDK and Third-Party Management Platform |
| Simultaneous Live View | Up to 20 channels |
| User/Host | Up to 32 users 3 levels: Administrator, Operator and User |
| Security Measures | User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption; IEEE 802.1x port-based network access control; IP address filtering |
| Client | iVMS-4200, iVMS-4500, iVMS-5200, Hik-Connect |
| Web Browser | IE 8 to 11, Chrome 31.0 to 44, Firefox 30.0 to 51 |
| Interface | |
| Alarm Interface | 2-ch alarm input and 1-ch alarm output |
| Audio Interface | 1-ch audio input and 1-ch audio output |
| Network Interface | 1 RJ45 10 M/100 M Ethernet, Hi-PoE |
| General | |
| Power | 24 VAC and Hi-PoE Max.: 22 W |
| Working Temperature | -30°C to 65°C (-22°F to 149°F) |
| Working Humidity | ≤ 90% |
| Protection Level | IP66 Standard, IK10, TVS 4000V Lightning Protection, Surge Protection and Voltage Transient Protection |
| Material | ADC 12, PC+ABS, PC/PMMA |
| Dimensions | Φ 220 mm × 280 mm (Φ 8.66" × 11.02") |
| Weight | Approx. 3 kg (6.61 lb) |

Order Model

7#0

Dimensions

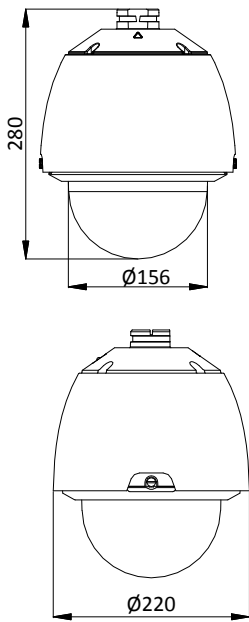

Unit: mm

Accessories



Wall Mounting Bracket



Corner Mounting Bracket



Vertical Pole Mounting Bracket



Wall Mounting Bracket with Junction Box



Ceiling Mounting Bracket



Pendant Mounting Bracket



Pendant Mounting Bracket



Gooseneck Mounting Bracket



Network Keyboard



USB Joy-stick