

Datasheet_FPS-3001TXU

LevelOne's Parallel-Port Pocket Printer Server

LevelOne's FPS-3001TXU is a compact Ethernet printer server which is designed to share any stand-alone parallel port printer resource to network users. This print server is equipped with a 10/100Mbps auto-sensing Ethernet port featuring either 10Mbps or 100Mbps network connections as well as a bi-directional parallel port that directly attaches to a parallel printer.

The FPS-3001TXU supports many operating systems including Unix, Novell, Mac system and Microsoft Windows to provide cross-platform accessibility. With the variety network protocols it supports, FPS-3001TXU offers the ideal printing solution in any working environment in order to finish your printing job easily. Moreover, this device also supports Internet Printing Protocol that allows users to print remotely to the parallel printer via the Internet.

Friendly web management features are ready for users easily to configure and maintain the device through a general web browser. The small-sized design will save the limited space and thus can be located anywhere on the network. With its standard features, the FPS-3001TXU offers the most exacting network printing solution for any environment from SOHO office to Enterprise thus increasing the productivity and saving costs.



FPS-3001TXU

Key Features


- 1 Parallel Printer Port, 1 RJ-45 Fast Ethernet Port
- Supports IPX/SPX, TCP/IP, PTP over TCP/IP, PTP over TCP/IP, Apple EtherTalk, SMB over NetBEUI network protocols
- Supports SNMP and HP Web JetAdmin
- Printing Throughput up to 650 Kbytes/sec
- Compact size for limited space
- Bi-directional communication
- Supports 3 logical printer
- Support Internet, IPP Printing
- Web Admin management
- Support Windows 95/98/98SE/ME/2000/NT, MAC, UNIX
- Firmware Upgradeable

Datasheet_FPS-3001TXU

Technical Specification

- **Standard Compliance**
IEEE 802.3
IEEE 802.3u
- **Network Interface**
1x RJ45 10/100Mbps Port
- **Printer Port**
1x DB 36 Parallel Port
- **Memory**
650 KB
- **Protocol Support**
TCP/IP, IPX/SPX
PTP over TCP/IP
PTP over NetBEUI
Apple Ether Talk
SMB over NetBEUI
- **Network Environment**
Win95/98/ME/2000/XP
MAC
UNIX
Netware NDS & Bindery
- **Special Features**
Internet Printing (proprietary)
IPP (Internet Printing Protocol)
Printing ECP Mode
Bi-directional IEEE 1284
- **Management**
WebAdmin Management
BiAdmin Management
NWAdmin Management
HP's JetAdmin
SNMP Management
- **Printing Throughput**
650 KB/sec
- **Logical Printer**
3
- **LEDs**
System Power/ Link
Status/ Error indicator
- **Power Input**
5V DC, 1.6A; External Power Adapter
- **Temperature**
Operating: 0°C~40°C
Storage: -10°C~70°C
- **Operating Humidity**
Operating: 10% ~ 80%
Storage: 5% ~ 90%
- **Dimensions**
59.7mm(W)*57mm(D)*20mm(H)
- **Certification**
FCC Class B

Product Diagram

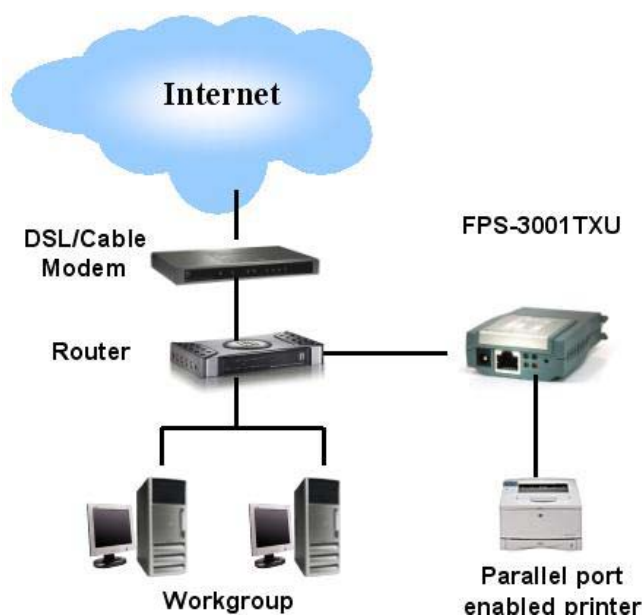

Ordering Information

- FPS-3001TXU: Parallel-Port Pocket Printer Server