



IES-0841

4 x 802.3af + 3 FE + 1 MM SC Web Smart Switch

-10 to 60C, DIN-rail

Overview

LevelOne IES-0841 Industry Ethernet Switch provides 4 PoE ports of 10/100Base-TX plus 3 ports of 10/100Base-TX Ethernet plus 1 port 100FX Multimode SC fiber to enable high speed network at mission-critical environment. This device is designed to be mounted on an industry standard DIN-rail, plus the clearly visible status LEDs provide simple monitoring of port link activity.

Cost Effective

This device operates under -10 to 60 Celsius (-14 to 140 Fahrenheit) temperature that offers optimal suitability for industrial applications at low cost while maintaining all components built to withstand harsh environment applications without compromise reliability and stability.

Power over Ethernet

This switch is Power Sourcing Equipment (PSE), and it is fully complied with IEEE 802.3af PoE standard at maximum 15.4W power budget per port. It helps to save infrastructure wiring costs dramatically by eliminating electric wiring and less UPS needed.

Redundancy

This redundant power system is designed to meet the challenge of power failure to ensure reliability and constant availability. Single power design works fine in non-critical network applications, but it falls short drastically for network applications in transportation, automate production or banking.

Web Management

Web-based GUI management features implementation of Port-based VLAN, IEEE802.1p QoS, Prioritised DSCP, set up Admin Password with ease. Plus, the Power over Ethernet ports can be On / Off and limits the power budget remotely.

Safety


This device has been tested under UL508 standard for Industrial Control Equipment to endurance under test turn on and off 6,000 times while loaded, with no single failure. It's highly reliability and safety measurement to ensure field hardened, especially for the harsh environment.

Features

- Provides flexibility of 8 Ethernet ports that configure in combinations of copper and fiber optic interfaces
- -10°C to 60°C (14°F to 140°F) and is tested for functional operation @ -20°C to 70°C (-4°F to 158°F)
- Port1 - 4 support IEEE802.3af Power over Ethernet (PoE) Power Sourcing Equipment (PSE)
- 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- Provides DIN-rail, panel or rack mounting
- System, IP Configuration, Port-based VLAN and QoS Priority setting through the Web browser Interface
- PoE (Power budget Control, PoE status, Port status) through the Web browser Interface
- Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment
- Alarms for power and port link failure by relay output
- Redundant power inputs with Terminal Block and DC Jack

Diagrams

Unit: mm

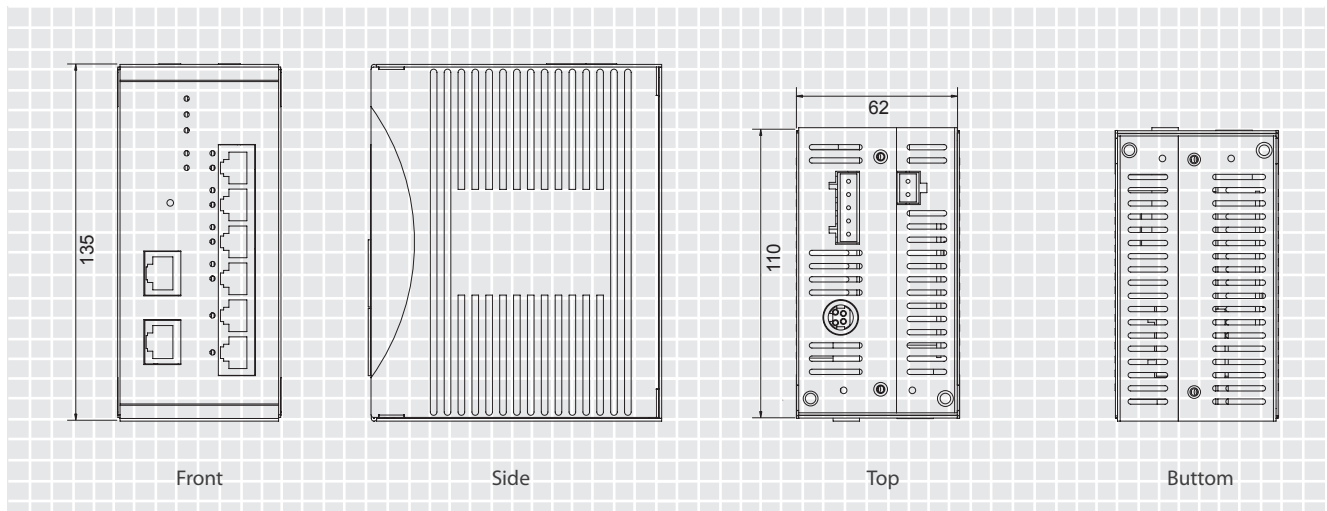

Specifications

Technology	
Standards	<ul style="list-style-type: none"> IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/FX, IEEE802.3x, IEEE802.3af
Forward and Filtering Rate	<ul style="list-style-type: none"> 14,880pps for 10Mbps 148,810pps for 100Mbps
Packet Buffer Memory	<ul style="list-style-type: none"> 1M bits
Processing Type	<ul style="list-style-type: none"> Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control
Address Table Size	<ul style="list-style-type: none"> 1024 MAC addresses

Power	
Power Input	<ul style="list-style-type: none"> Redundant power inputs: Terminal Block: 47 - 55VDC DC Jack: 47 - 55 VDC
Power Consumption	<ul style="list-style-type: none"> Device: Max. 10W (without PoE) PoE power budget (depends on power input): 61.6W Max.
PoE Power Output	<ul style="list-style-type: none"> Port 1 to 4 IEEE802.3af: up to 15.4W/port, 47 - 55VDC, 350mA Max
	<ul style="list-style-type: none"> Supports overload current protection Supports reverse polarity protection

Mechanical	
Casing	<ul style="list-style-type: none"> Metal case IP30
Dimensions	<ul style="list-style-type: none"> 62mm (W) x 110mm (D) x 135mm (H) (2.44" (W) x 4.33" (D) x 5.31" (H))
Weight	<ul style="list-style-type: none"> 1Kg (2.2lbs.)
Installation	<ul style="list-style-type: none"> DIN-Rail (Top hat type 35mm), Panel, Rack Mounting

Interface	
Ethernet Port	<ul style="list-style-type: none"> 10/100BASE-TX: 8, 7 or 6 ports 100BASE-FX: 0, 1 or 2 ports
LED Indicators	<ul style="list-style-type: none"> Per Unit: Power Status (Power 1, Power 2, Power 3) Per Port: 10/100TX, 100FX: Link/Activity (Green) PoE: Link (Amber)
Alarm Contact	<ul style="list-style-type: none"> One relay output with current 1A @ 24VDC

Environment	
Operating Temperature	<ul style="list-style-type: none"> -10°C to 60°C (14°F to 140°F) Tested @ -20°C to 70°C (-4°F to 158°F)
Storage Temperature	<ul style="list-style-type: none"> -40°C to 85°C (-40°F to 185°F)
Ambient Relative Humidity	<ul style="list-style-type: none"> 5% to 95% (non-condensing)
MTBF	<ul style="list-style-type: none"> 64.39 years

Regulatory Approvals	
ISO	<ul style="list-style-type: none"> Manufactured in an ISO9001 facility
Safety	<ul style="list-style-type: none"> UL508 (Pending)
EMI	<ul style="list-style-type: none"> FCC Part 15, Class A EN61000-6-4 <ul style="list-style-type: none"> EN55022 EN61000-3-2 EN61000-3-3
EMS	<ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) Contact: + / - 4KV; Criteria B Air: + / - 8KV; Criteria B EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 1000MHz; 80% AM Criteria A 3V/m, 1400 to 2000MHz; 80% AM Criteria A 1V/m, 2000 to 2700MHz; 80% AM Criteria A EN61000-4-4 (Burst Standards) Signal Ports: + / - 4KV; Criteria B D.C. Power Ports: + / - 4KV; Criteria B EN61000-4-5 (Surge Standards) Signal Ports: + / - 1KV; Line-to-Line; Criteria B D.C. Power Ports: + / - 0.5KV; Line-to-Earth; Criteria B EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz; Criteria A
Environmental Test Compliance	<ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) 1M (3.281ft.)

Order Information

IES-0841 - 4 x 802.3af + 3 FE + 1 MM SC Web Smart Switch -10 to 60C, DIN-rail

Package Contents

IES-0841
 CD Manual / Utility
 Quick Installation Guide