



2-Port PS/2 KVM Switch w/ Audio



KVM-0211

H/W Version: 1

Product Overview

The LevelOne KVM-0211 connects two computer systems to a single PS/2 keyboard, PS/2 mouse and monitor. The 2-Port PS/2 KVM Switch also provides audio support allowing users to connect the audio ports of each computer to the KVM switch.

The KVM-0211 is a Plug-and-Play KVM switch that requires no power supply and no additional software installation. Users simply connect the KVM switch to the PS/2 mouse and keyboard and screen ports on each computer as well as the audio ports by using the included cables.


Easy to Switch between Computers

The KVM-0211 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch also offers

user the ability to program the auto-scan function for automatic switching between computers. The LED display offers an "at-a-glance" status display for easy computer activity assessment.

Flexible Multimedia Feature

Users are now offered with flexible multimedia support. The KVM-0211 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computer for work or fun.

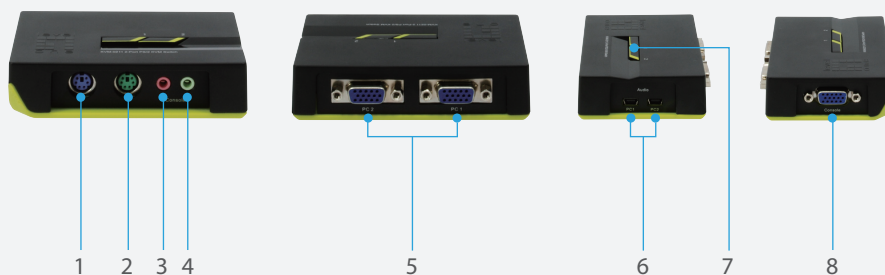

1. PS/2 Console Port
2. PS/2 Console Port
3. Mic Console Port
4. Audio Console Port
5. VGA PC Port
6. Mini USB 3.5mm Audio/Mic PC Port
7. Port LED
8. VGA Console Port

Key Features

- Flexible switching for an uninterrupted multi-media experience
- Control and manage two computers using a single PS/2 keyboard mouse and monitor
- Simultaneous or independent PC and Audio
- User-programmable switching
- High 2048 x 1536 pixels VGA resolution
- Easy switching between computer with Auto-
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- PS/2 interface power supply

Related Products



KVM-0411
4-Port PS/2 KVM Switch w/ Audio



KVM-0212
2-Port PS/2 KVM Switch

Technical Specification

Console Port:

Keyboard: PS/2 x 1

Mouse: PS/2 x 1

Video: HDB 15-pin (Female)

Audio Input/ Output: 3.5mm jack x 1

Mic Input/ Output: 3.5mm Mic jack x 1

PC Port:

HDB 15-pin Female (Integrated w/ PS/2 Interface) x 2

Mini USB 3.5mm Audio jack

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

2 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

PS/2 Interface Power

Microphone Supported:

V

Cables:

PS/2 KVM Combo Cable Sets (1.8m) x 2

Mini USB 3.5mm Audio/Mic Cables x 2

Max. Resolution:

2048 x 1536

Scanning Interval:

5,10,20,30,40,50,60,70,80,90,100 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

118


Dimensions (L x W x H):

96mm x 61mm x 24mm

OS Supported:

Win

Product Diagram

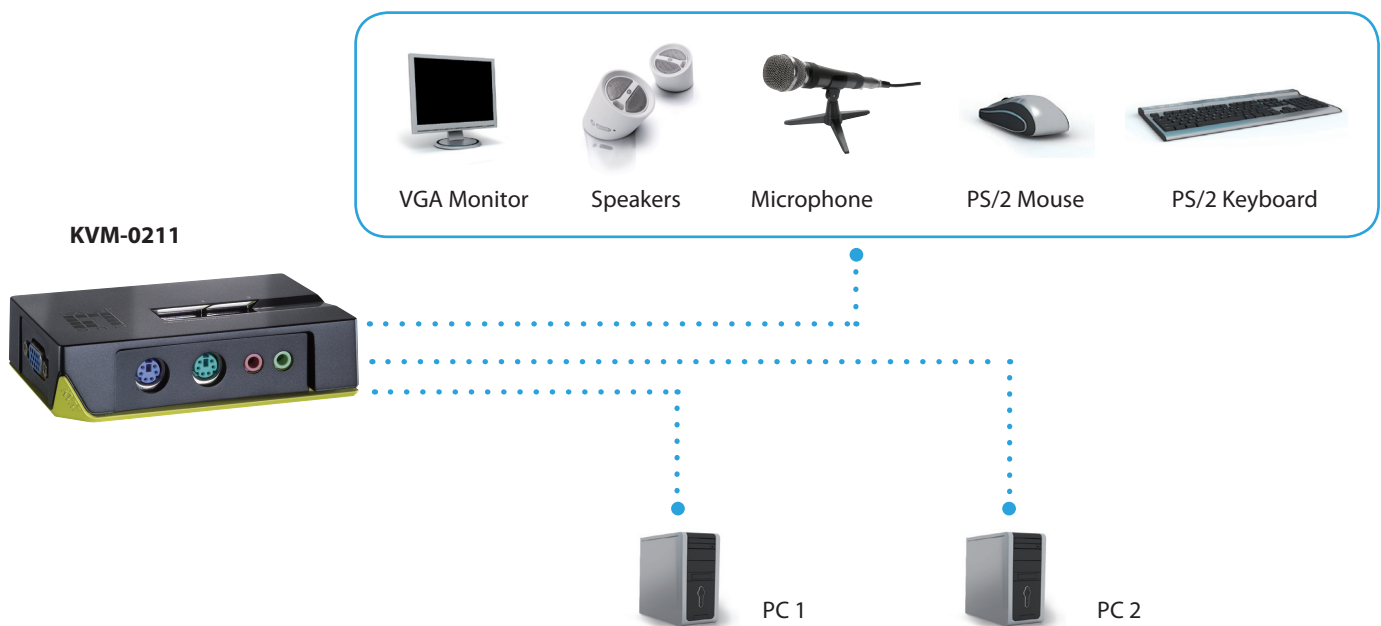

Order Information

Package Content

KVM-0211: 2-Port PS/2 KVM Switch w/ Audio

KVM-0211

KVM cable sets

CD Manual

Quick Installation Guide