



2-Port PS/2 KVM Switch



KVM-0213

H/W Version: 1

Product Overview

The LevelOne KVM-0213 is an easy to use 2-port PS/2 KVM switch for connecting 2 multi-platform operating system computers to a single keyboard, mouse and monitor. It also allows users to connect audio from the connected computers to a single audio system.

Multi-Platform Use

The KVM-0213 supports multi-platform computer systems, enabling users to control all there computers using a single console. With easy hot-key swap selection between computers, users can operate both systems simultaneously.

All cables needed are already connected to the KVM switch. Users can connect the PS/2 KVM without any need for additional software installation or system configuration. Also, the KVM-0213 requires no power to operate.

High Quality Audio/Video Support

The 2-port KVM-0213 supports DDC2B and VGA resolutions of up to 2048 x 1536 pixels. The switch also incorporates audio support, allowing users to connect audio channels of both systems to a single audio system.



1. PS/2 Console Port
2. VGA Console Port
3. PS/2 Console Port
4. Speaker Jack
5. Port LED
6. Video Connector
7. PS/2 Keyboard Connector
8. PS/2 Mouse Connector
9. Speaker Connector

Key Features

- 2-port PS/2 KVM Switch for home or office use
- Connect multi-platform operating system computers to a single keyboard, mouse and monitor
- Supports high-video quality – up to 2048 x 1536 pixels
- Easy installation with no software installation
- All cables attached, ready-for-use
- Features audio support
- Provides auto-scanning
- LED display for easy status monitoring
- Provides Hot-Key port switching

Related Products



KVM-0223
2-Port USB KVM Switch



KVM-0260
2-Port USB DVI KVM Switch w/ Audio

Technical Specification

Console Port:

Keyboard: PS/2
 Mouse: PS/2
 Video: VGA

PC Port:

Keyboard: PS/2 x 2
 Mouse: PS/2 x 2
 Video: VGA x 2

Stereo Audio Input:

3.5mm jack

Monitor Supported:

VGA

LEDs:

2 Port Status LEDs

HUB Supported

-

Mic Supported

-

Molding Cable:

V

Console Cable Length:

1.2m

PC Cable Length:

1.2m

Max. Resolution:

2048 x1536

Scanning Interval:

3,5,10,20 Seconds

Operating Temp.:

0~50°C

Storage Temp.:

-20°C~60°C

Humidity:

0~80% RH Non-Condensing

Enclosure:

High- impact Plastic

Weight (g) :

410


Dimensions (L x W x H)

8.1cm x 6.3cm x 2.35 cm

OS Supported:

Win

Product Diagram

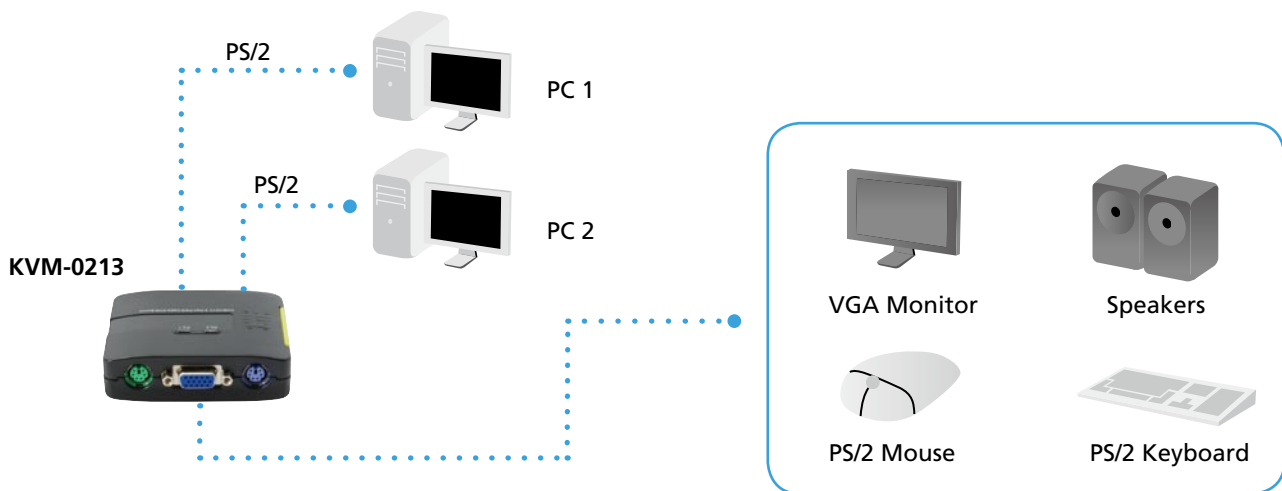

Order Information

KVM-0213: 2-Port PS/2 KVM Switch

Package Content

KVM-0213

User Manual

Quick Installation Guide