

## WDS 設定

可適用於: WBR-3406TX, WBR-3402, WBR-3404TX, WBR-3403TX, WBR-5400 and WAP-0010。

敘述:

- 1) A WBR-3406TX 成爲一節點 連接到數據機。
- 2) B WBR-3406TX WDS 到 A WBR-3406 TX。

注意產品本身的連結問題:

- 1) A WBR-3406TX WAN 埠 連結到 ADSL/Cable 數據機。
- 2) B WBR-3406TX WAN 埠 → 不使用(產品本身沒有連接)

### A WBR-3406TX 設定:

- 1) A WBR-3406TX WAN 狀態

The screenshot shows the web console interface for a WBR-3406TX router. The browser window title is "WBR-3406TX Wireless Broadband NAT Router Web-Console - Microsoft Internet Explorer". The address bar shows "http://192.168.10.1/". The page title is "Broadband Router Configuration". The interface is in English. The "Status" tab is selected, showing the following WAN Status information:

Item	WAN Status	Sidenote
IP Address	218.167.4.77	PPPoE
Subnet Mask	255.255.255.255	
Gateway	218.167.4.77	
Domain Name Server	168.95.192.1, 168.95.1.1	
Connection Time	00:32:38	<input type="button" value="Disconnect"/>

Below the WAN Status table, there is a "Statistics of WAN" section with the following data:

Statistics of WAN	Inbound	Outbound
Octets	4521298	289700
Unicast Packets	4051	1722
Non-unicast Packets	0	1

At the bottom of the status section, there are buttons for "View Log...", "Clients List...", "Help", and "Refresh". The system time is displayed as "System Time: Friday, July 08, 2005 12:12:24 PM". The current time is "Friday, July 08, 2005 12:12:40 PM".

## 2) A WBR-3406TX LAN 設定

The screenshot shows the 'Primary Setup' configuration page in the WBR-3406TX Web Console. The interface is in English. The left sidebar shows 'Basic Setting' with sub-items: Primary Setup, DHCP Server, Wireless, and Change Password. The main content area is titled 'Primary Setup' and contains a table of configuration items.

Item	Setting
LAN IP Address	192.168.10.1
WAN Type	PPP over Ethernet <input type="button" value="Change..."/>
PPPoE Account	84685158@hinet.net
PPPoE Password	
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0
Maximum Idle Time	600 seconds <input checked="" type="checkbox"/> Auto-reconnect
Authentication method	Auto

Buttons at the bottom: Save, Undo, More>>, Help.

Current Time: Friday, July 08, 2005 12:13:36 PM

## 3) A WBR-3406TX DHCP 伺服器設定

The screenshot shows the 'DHCP Server' configuration page in the WBR-3406TX Web Console. The interface is in English. The left sidebar shows 'Basic Setting' with sub-items: Primary Setup, DHCP Server, Wireless, and Change Password. The main content area is titled 'DHCP Server' and contains a table of configuration items.

Item	Setting
DHCP Server	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
Lease Time	1 HOUR
IP Pool Starting Address	50
IP Pool Ending Address	200
Domain Name	

Buttons at the bottom: Save, Undo, More>>, Clients List..., Fixed Mapping..., Help.

Current Time: Friday, July 08, 2005 12:14:46 PM

#### 4) A WBR-3406TX Wireless 設定

level<sup>®</sup> Broadband Router Configuration

English Deutsch 中文 한국어

Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox • Logout

**Basic Setting**

- ▶ Primary Setup
- ▶ DHCP Server
- ▶ Wireless
- ▶ Change Password

**Wireless Setting**

Item	Setting
▶ Network ID (SSID)	3406WDS
▶ SSID broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ Channel	11
▶ Security	<input checked="" type="radio"/> Disable <input type="radio"/> WEP <input type="radio"/> 802.1x and RADIUS <input type="radio"/> WPA-PSK <input type="radio"/> WPA

Current Time  
Friday, July 08, 2005 12:21:13 PM

Save Undo WDS Setting... MAC Address Control... Help

#### 5) A WBR-3406TX 區域網路 MAC 位址

System Information

ITEM	INFO
Version	747D.7166.74AB.1AD9+225B+0010@SuezouW 197e1 \$611
U-Time	00:00:37 (S=00:00:00,P=0/0)00:01:22
D-String	P=7C00,S=0,D=0/0,E=0,B=51/0,R=FFFE {+++++.++++.++++.++++.++++T.....}
R-Data	WAN MAC=00-11-6B-22-20-AB/DDC6031 LAN MAC=00-11-6B-22-20-AC Checksum=347C
A-String	RA11G;M=00-11-6B-22-20-AC; D=ETSI;A=2;C=1FFF;R=3FFF;St=2;TQ:15/15/15;PriQ:5/5;RQ:29/29;CNT=0/0/0
Device Time	Tue Feb 01 00:01:22 2005

Refresh

## 6) A WBR-3406TX WDS 設定

WBR-3406TX Wireless Broadband NAT Router Web-Console - Microsoft Internet Explorer

Address: http://192.168.10.1/

level®  
one  
Broadband Router Configuration  
English Deutsch 中文 한국어  
Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox • Logout

**Basic Setting**

- ▶ Primary Setup
- ▶ DHCP Server
- ▶ Wireless
- ▶ Change Password

**WDS Setting**

Item	Setting
▶ Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
▶ Remote AP MAC	00-11-6B-22-51-50

Save Undo Help

**Current Time**  
Friday, July 08, 2005 12:20:25 PM

Done Internet

Start WBR-3406TX Wi... E:\WINDOWS\Sys... B sysinfo - Paint 輸入字詞以搜尋 12:21 PM

## B WBR-3406TX 設定:

### 1) B WBR-3406TX Lan 設定

The screenshot shows the LevelOne Broadband Router Configuration web console in Microsoft Internet Explorer. The browser address bar shows <http://192.168.10.10/>. The page title is "Broadband Router Configuration". The navigation menu includes: Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox. The "Basic Setting" menu is expanded, showing: Primary Setup, DHCP Server, Wireless, and Change Password. The "Primary Setup" page contains a table with the following settings:

Item	Setting
LAN IP Address	192.168.10.10
WAN Type	Dynamic IP Address <input type="button" value="Change..."/>
Host Name	<input type="text"/> (optional)
WAN's MAC Address	00-11-6B-22-51-4F <input type="button" value="Clone MAC"/>
Renew IP Forever	<input type="checkbox"/> Enable(Auto-reconnect)

Buttons at the bottom: Save, Undo, Virtual Computers..., Help. Current Time: 2005-2-1 0:06:46.


### 2) B WBR-3406TX DHCP 伺服器設定

The screenshot shows the LevelOne Broadband Router Configuration web console in Microsoft Internet Explorer. The browser address bar shows <http://192.168.10.10>. The page title is "Broadband Router Configuration". The navigation menu includes: Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox. The "Basic Setting" menu is expanded, showing: Primary Setup, DHCP Server, Wireless, and Change Password. The "DHCP Server" page contains a table with the following settings:


Item	Setting
DHCP Server	<input checked="" type="radio"/> Disable <input type="radio"/> Enable
Lease Time	1 HOUR
IP Pool Starting Address	100
IP Pool Ending Address	199
Domain Name	<input type="text"/>

Buttons at the bottom: Save, Undo, More>>, Clients List..., Fixed Mapping..., Help. Current Time: Tuesday, February 01, 2005 12:31:51 AM.

### 3) B WBR-3406TX Wireless 設定

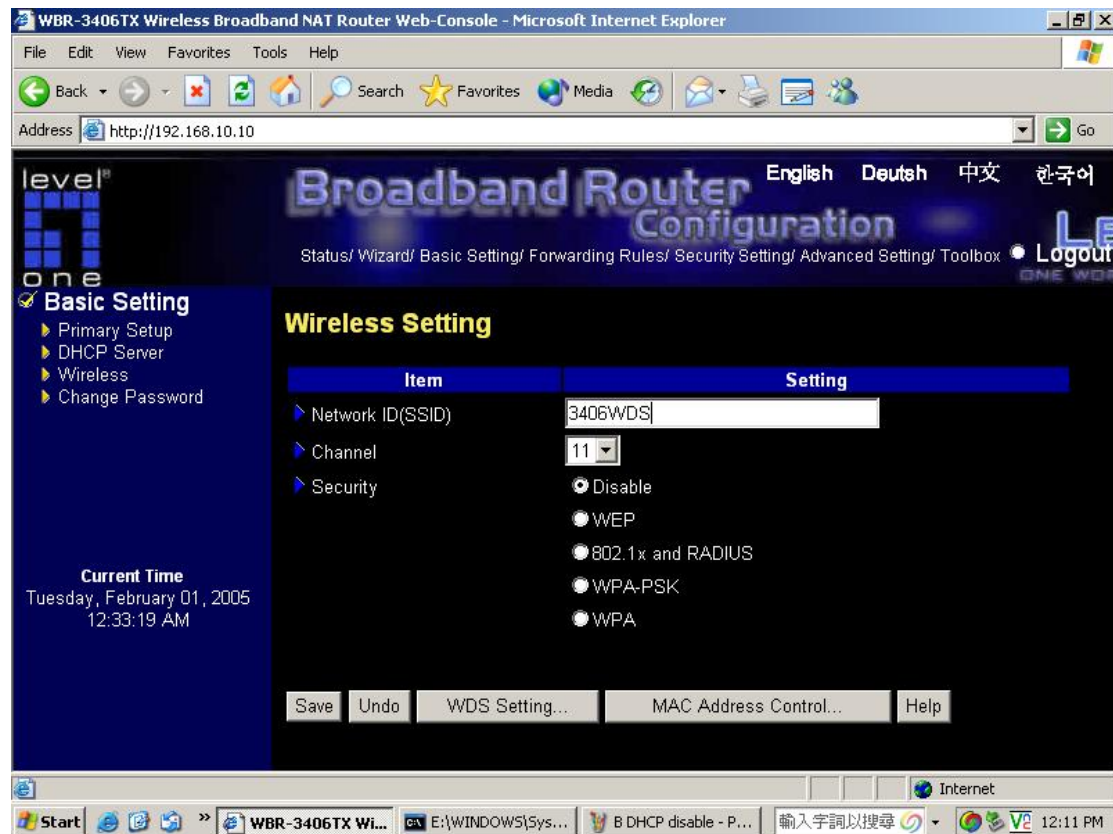

### 4) B WBR-3406TX 區域網路 MAC 位址

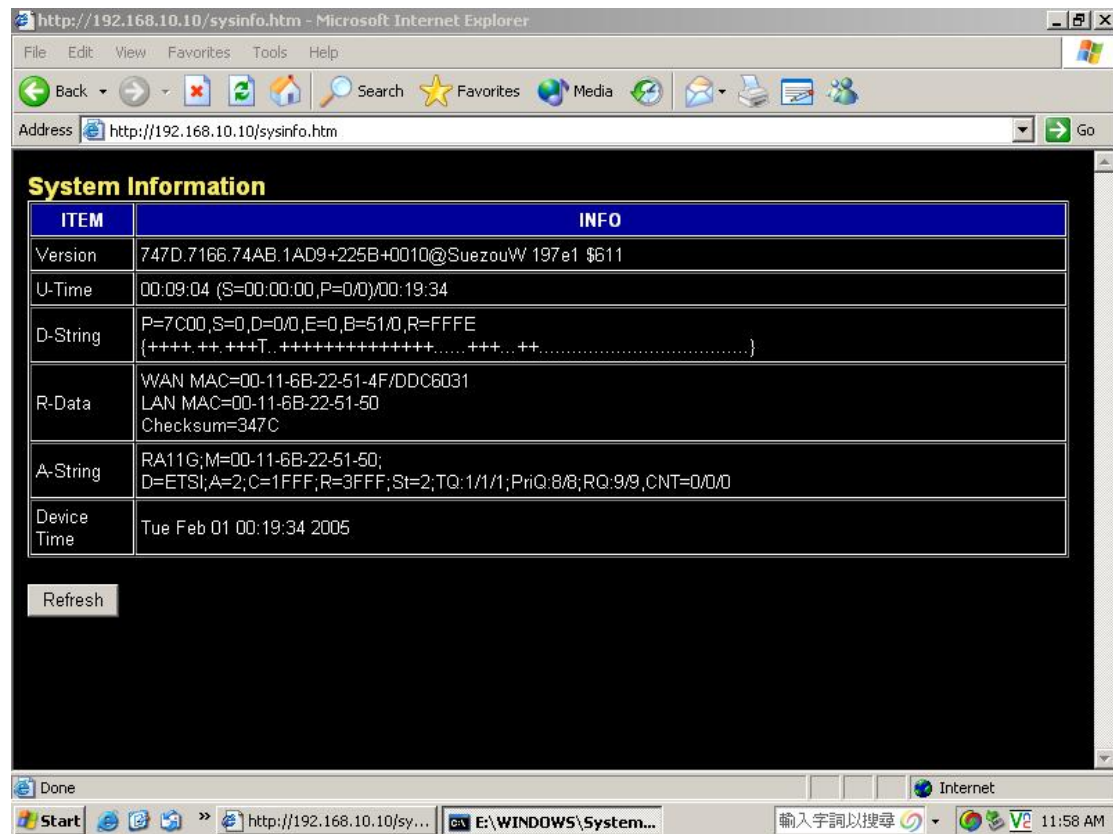

## 5) B WBR-3406TX WDS 設定

WBR-3406TX Wireless Broadband NAT Router Web-Console - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address <http://192.168.10.10/> Go

level<sup>®</sup> **Broadband Router Configuration** English Deutsch 中文 한국어

Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox • Logout

**Basic Setting**

- ▶ Primary Setup
- ▶ DHCP Server
- ▶ Wireless
- ▶ Change Password

**WDS Setting**

Item	Setting
▶ Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
▶ Remote AP MAC	<input type="text" value="00-11-6B-22-20-AC"/> <input type="text"/> <input type="text"/>

Save Undo Help

**Current Time**  
Tuesday, February 01, 2005  
12:02:09 AM

Done Internet

Start WBR-3406... rhn.redhat.c... GRUB Manu... E:\WINDOW... 輸入字詞以搜尋 2:37 PM