



2-Port USB KVM Switch w/ Audio



KVM-0221

H/W Version: 1

Product Overview

The KVM-0221 2-Port USB KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage two computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from any computer without switching cables.

Flexible Multimedia Feature


Users are now offered with flexible multimedia support. The KVM-0221 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computer for work or fun.

The KVM-0221 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.

One Keyboard, Mouse and Monitor for Two Computers

The LevelOne KVM-0221 connects two computer systems to a single USB keyboard, USB mouse and monitor. The 2-Port USB KVM Switch also provides audio support allowing users to connect the audio ports of each computer to the KVM switch.

The KVM-0221 is a Plug-and-Play KVM switch that requires no power supply. Users simply connect the KVM switch to the USB mouse and keyboard and screen ports on each computer as well as the audio ports by using the included cables.

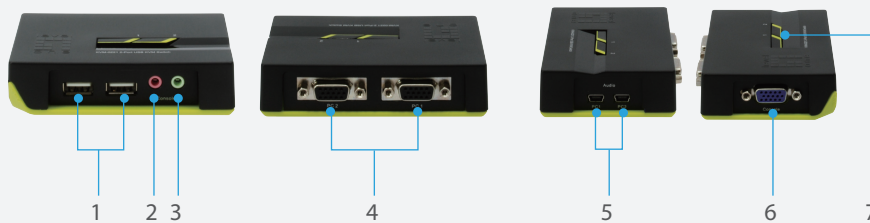

1. USB Console Port
2. Mic Console Port
3. Audio Console Port
4. VGA PC Port
5. Mini USB 3.5mm Audio/Mic PC Port
6. VGA Console Port
7. Port LED

Key Features

- Flexible switching for an uninterrupted multi-media experience across multi-platforms
- Control and manage two computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- Easy switching between computers with keyboard hotkeys push button and utility (or software) selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows and Mac-based switching software utility included

Related Products



KVM-0421
4-Port USB KVM Switch w/ Audio



KVM-0222
2-Port USB KVM Switch

Technical Specification

Console Port:

Keyboard: USB x 1
 Mouse: USB x 1
 Video: HDB 15-pin (Female)
 Audio Input/ Output: 3.5mm jack x 1
 Mic Input/ Output: 3.5mm Mic jack x 1

PC Port:

USB x 2
 HDB 15-pin Female x 2
 Audio / Mic Connector x 2

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

2 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

USB Interface Power

Microphone Supported:

V

Cables:

USB KVM Combo Cable Sets (1.8m) x 2
 Min USB 3.5mm Audio / Mic Cables x 2

Max. Resolution:

2048 x 1536

Scanning Interval:

10,15,20,25,30,35,40,45,50,55,60 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

116


Dimensions (L x W x H):

96mm x 61mm x 24mm

OS Supported:

Win & Mac

Product Diagram

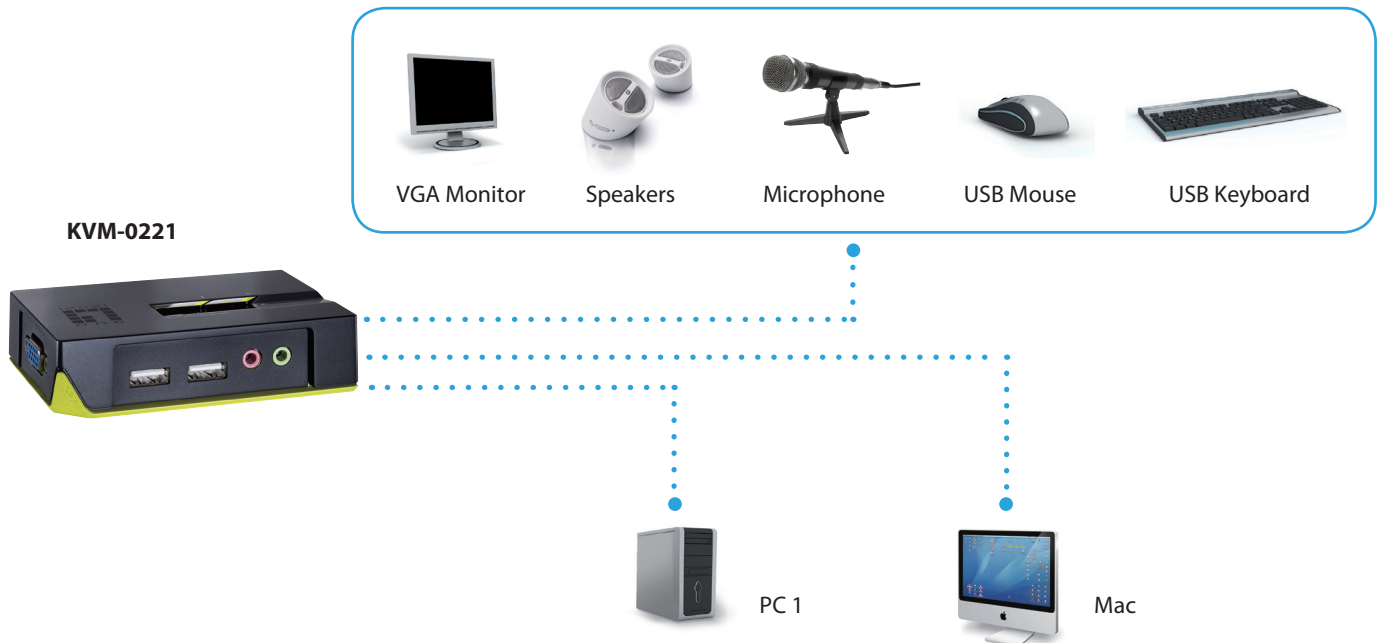

Order Information

Package Content

KVM-0221: 2-Port USB KVM Switch with Audio

KVM-0221
 KVM cable sets
 CD Manual
 Quick Installation Guide