



4-Port PS/2 KVM Switch w/ Audio



KVM-0411

H/W Version: 1

Product Overview

The KVM-0411 4-Port PS/2 KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage four computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from whichever computer without switching cables.

It allows users to access, control, boot and reboot four PS/2-enabled multimedia computers using a single PS/2 keyboard, mouse and monitor and a speaker set and microphone.

Flexible Multimedia Feature


Users are now offered with flexible multimedia support. The KVM-0411 offers users with user-programmable simultaneous or independent

PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computers for work or fun.

One Keyboard, Mouse and Monitor controlling Two Computers

The LevelOne KVM-0411 connects four computer systems to a single PS/2 keyboard, PS/2 mouse and monitor. The 2-Port PS/2 KVM Switch also provides audio support allowing users to connect the audio ports of each computer to the KVM switch.

The KVM-0411 is a Plug-and-Play KVM switch that requires no power supply and no additional software installation. Users simply connect the KVM switch to the PS/2 mouse and keyboard and screen ports on each computer as well as the audio ports by using the included cables.

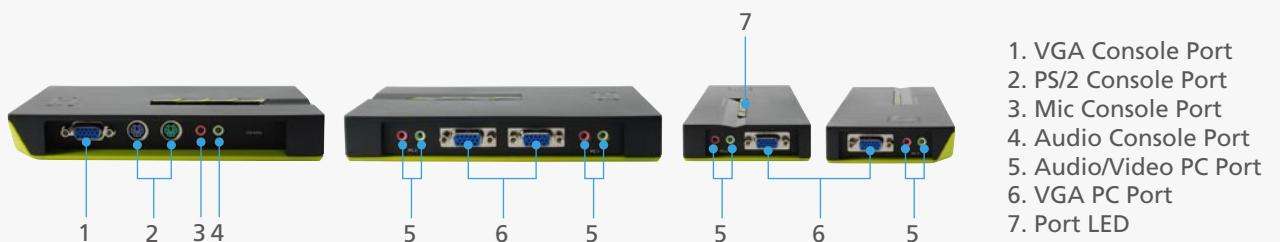

Key Features

- Flexible switching for an uninterrupted multimedia experience
- Control and manage four computers using a single PS/2 keyboard and mouse and monitor
- Simultaneous and independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- Easy switching between computers with Auto-scan, keyboard hotkeys and push button selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- PS/2 interface power supply

Related Products



KVM-0211
2-Port PS/2 KVM Switch w/ Audio



KVM-0212
2-Port PS/2 KVM Switch

Technical Specification

Console Port:

Keyboard: PS/2 x 1

Mouse: PS/2 x 1

Video: HDB 15-pin (Female)

Audio Input/ Output: 3.5mm jack x 1

Mic Input/ Output: 3.5mm Mic jack x 1

PC Port:

3.5mm Mic jack x 4

3.5mm Audio jack x 4

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

4 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

PS/2 Interface Power

Microphone Supported:

V

Cables:

PS/2 KVM Combo Cable Sets (1.8m) x 4

Audio / Mic Cables x 8

Max. Resolution:

2048 x 1536

Scanning Interval:

5, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

234


Dimensions (L x W x H):

164mm x 72mm x 26mm

OS Supported:

Win

Product Diagram

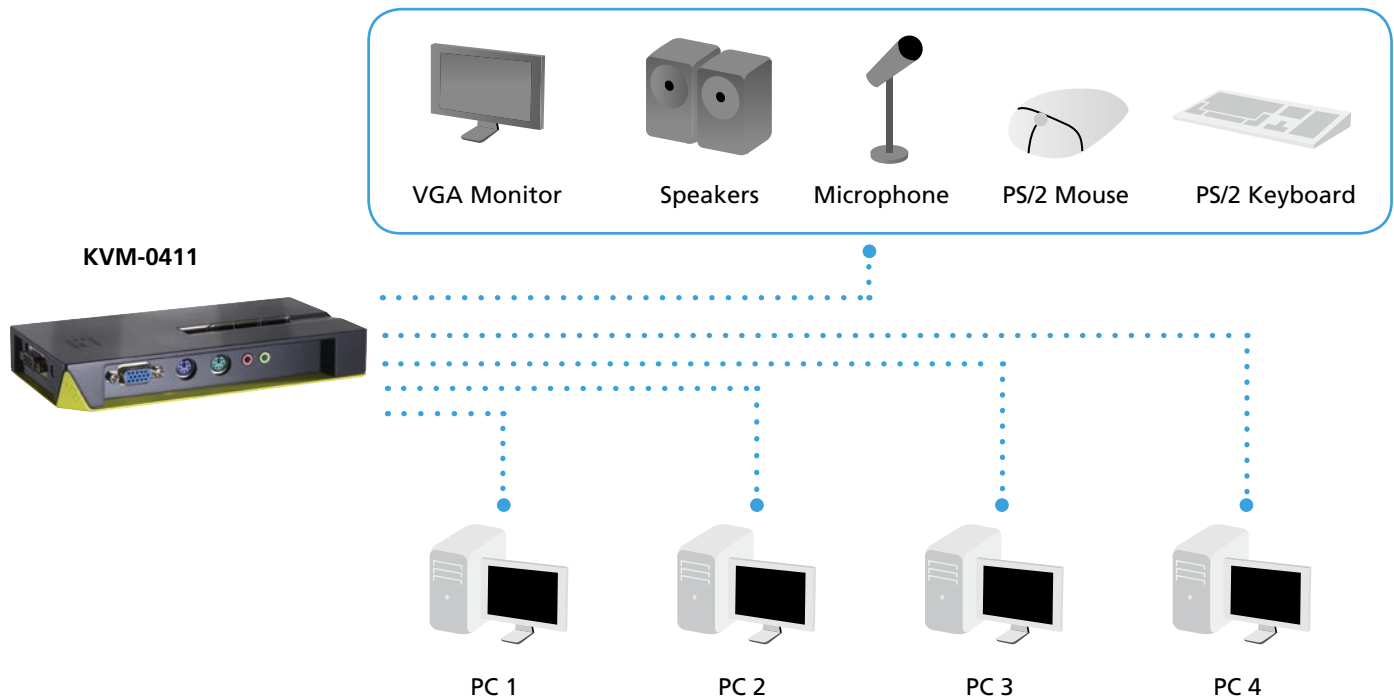

Order Information

KVM-0411: 4-Port PS/2 KVM Switch with Audio

Package Content

KVM-0411

KVM cable sets

CD Manual

Quick Installation Guide