



LevelOne IP Camera Quick Installation Guide



Quick Installation Guide

This QIG applies to : FCS-1010/1030/1040/1050/1060/1070/3000

WCS-2010/2030/2040/2060/2070

Software Installation


Please insert the CD-ROM that comes with the LevelOne IP camera packet.

The installation page should pop up. If you do not see the pop up, please go into the CD-ROM directory and click on AutoRun.exe




Click on "Install Software".




Click on "Installation Wizard".

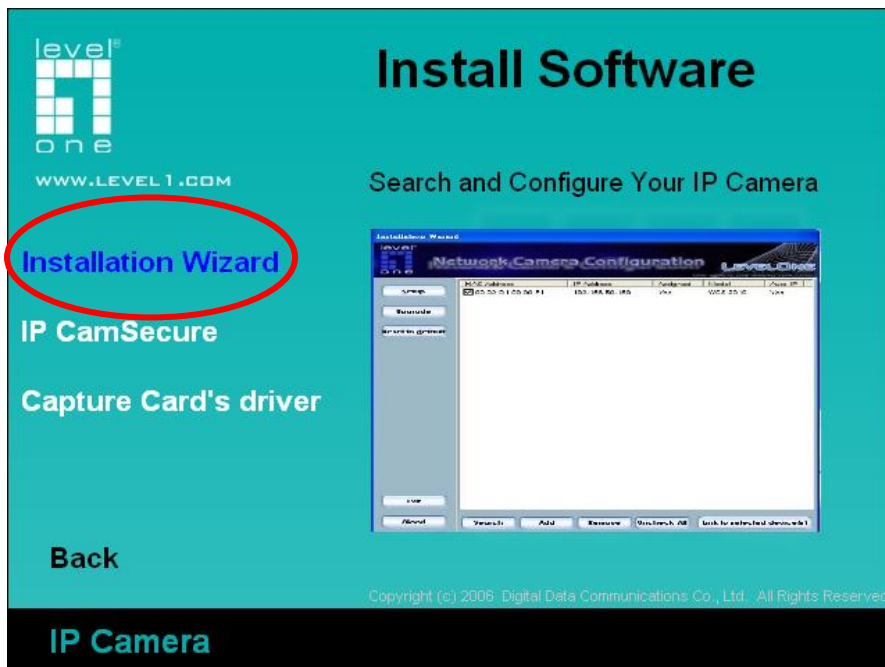

Please follow the wizard by clicking “Next”.

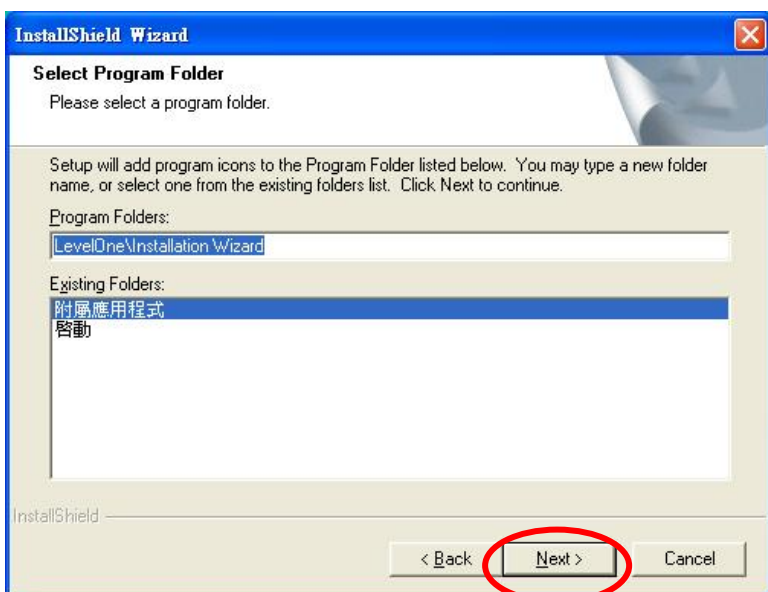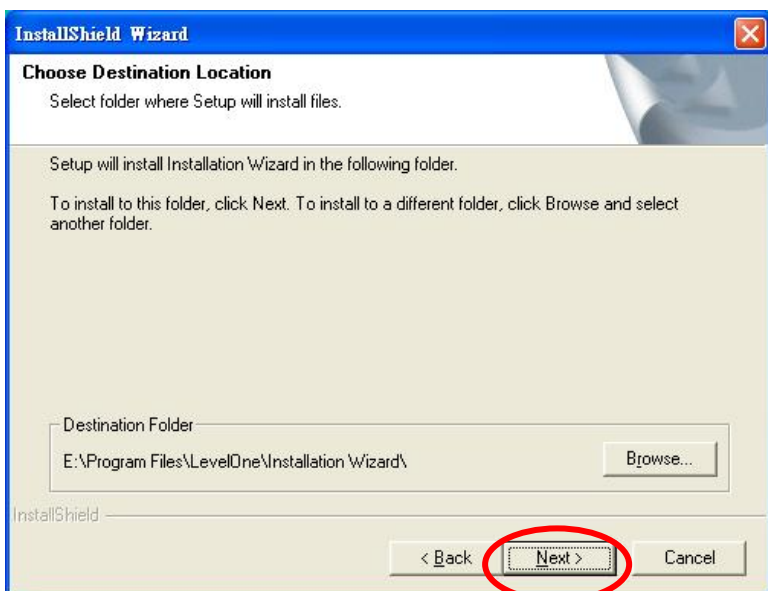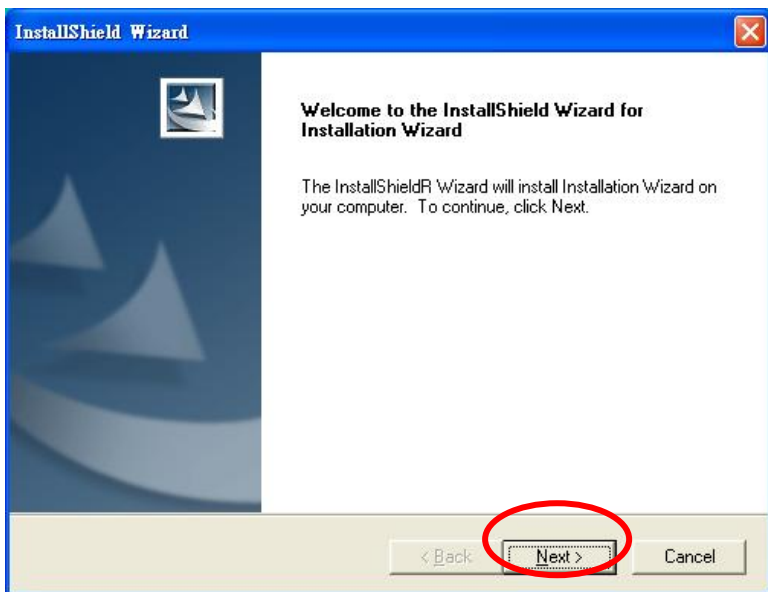


Click on “Finish” to complete the installation.

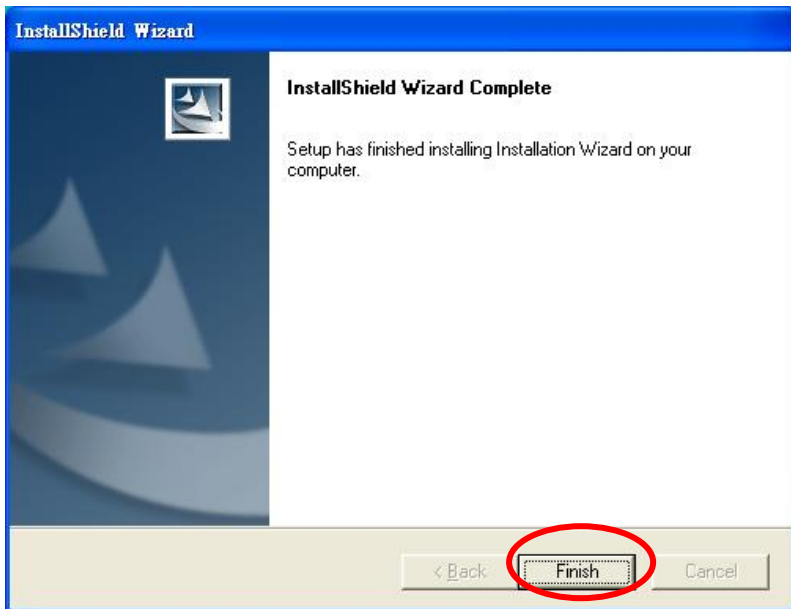


Click on the Installation Wizard on your Windows Desktop.




Please choose the IP Camera by MAC address and click “Link to selected device”.

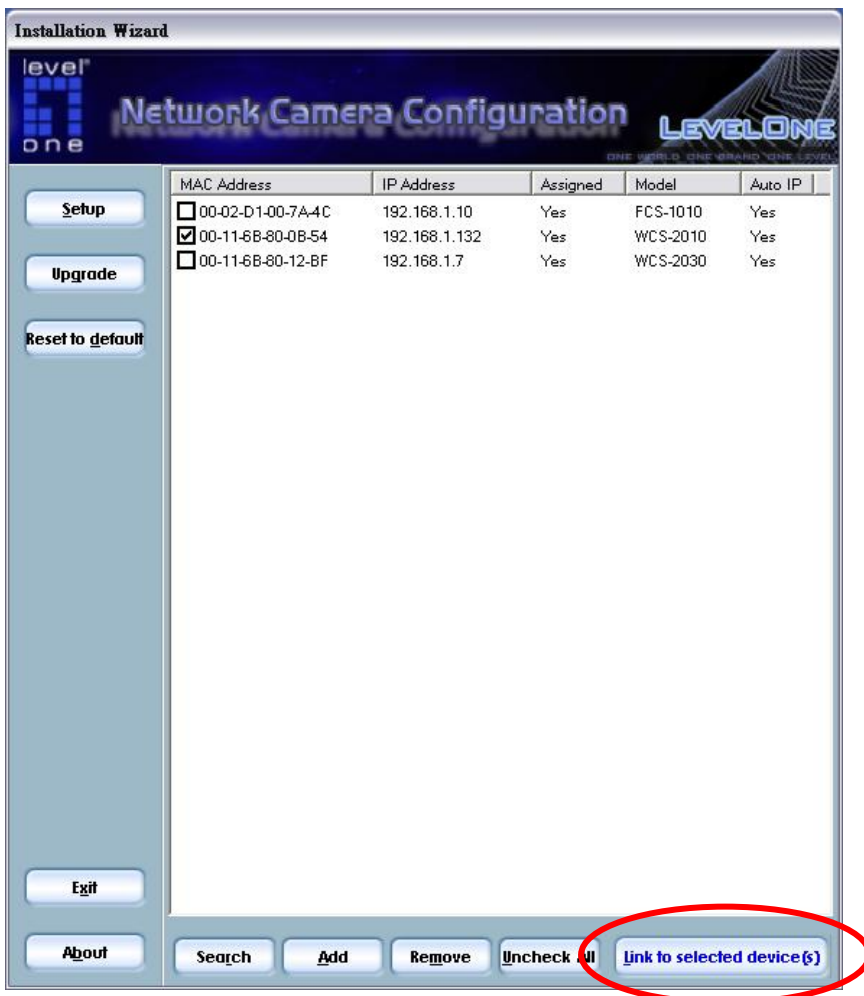


Initial login will have a Window pop up, please click "yes".

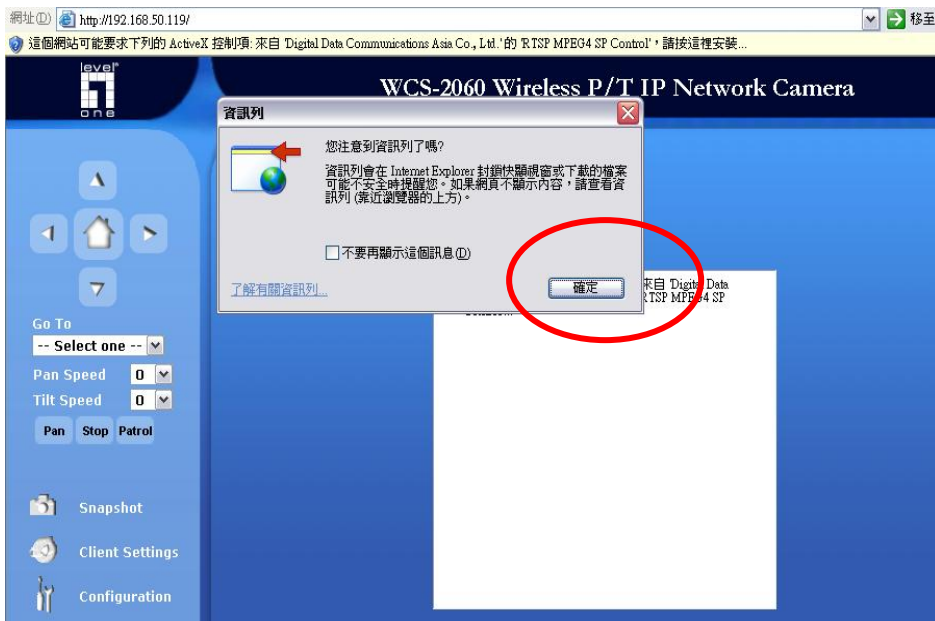

Install Active X.

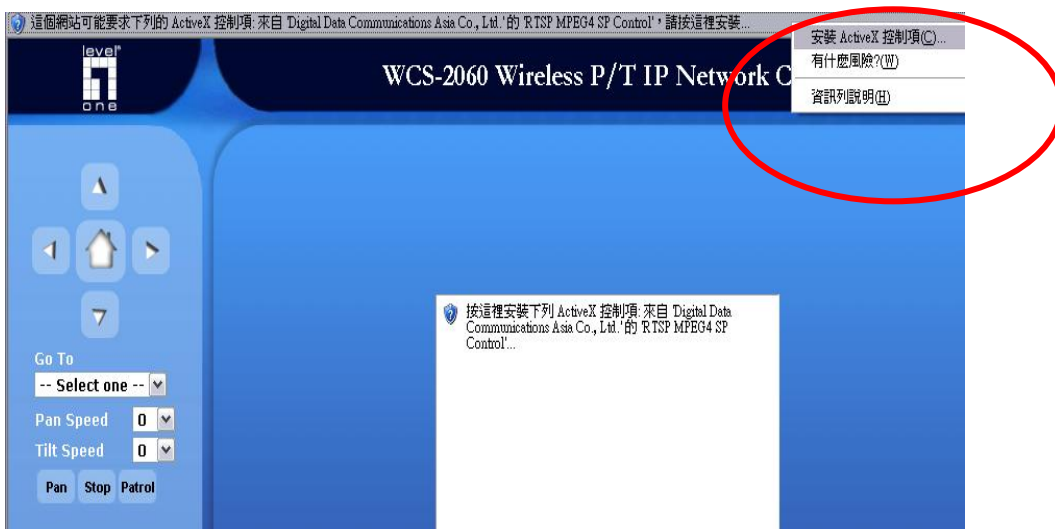

Complete installation.

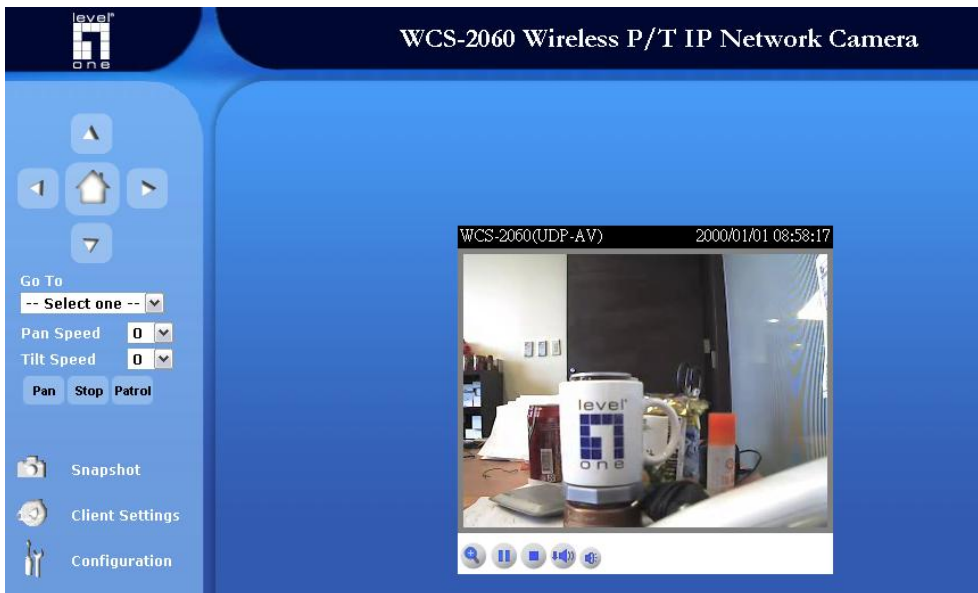

Wireless installation

This applies to WCS-2010/2030/2040/2060/2070

Login to the web configuration page, click on Wireless LAN.

Configuration

LEVELONE WCS-2060 WIRELESS P/T IP NETWORK CAMERA

HOME

- System
- Security
- Network
- Wireless LAN
- DDNS
- Access list
- Audio and video
- Camera control
- Email and FTP
- Motion detection
- Application
- System log
- View parameters
- Maintenance

WLAN configuration

SSID: default

Wireless mode: Infrastructure

Channel: 6

TX rate: Auto

Security: None

Save

SSID : Enter the SSID of your wireless AP.

Wireless Mode : Infrastructure, if your network is in multiple AP clients to AP mode.
Ad-Hoc : If your network is in point to point connection.

Security : Please match the security setting of your AP.

Version: 0200c

完成

Please press “save” after configuration, and then unplug your power cord and RJ-45 LAN cable. Insert Power cord, do not insert RJ-45 LAN cable. LevelOne IP camera should automatically connect to the preset AP.

Surveillance System QIG

Please insert the CD-ROM that comes with the LevelOne IP camera packet.

The installation page should pop up. If you do not see the pop up, please go into the CD-ROM directory and click on AutoRun.exe.


Click on "Installation Software".




Click on **IP CamSecure**.




Choose the Language, click “next”.

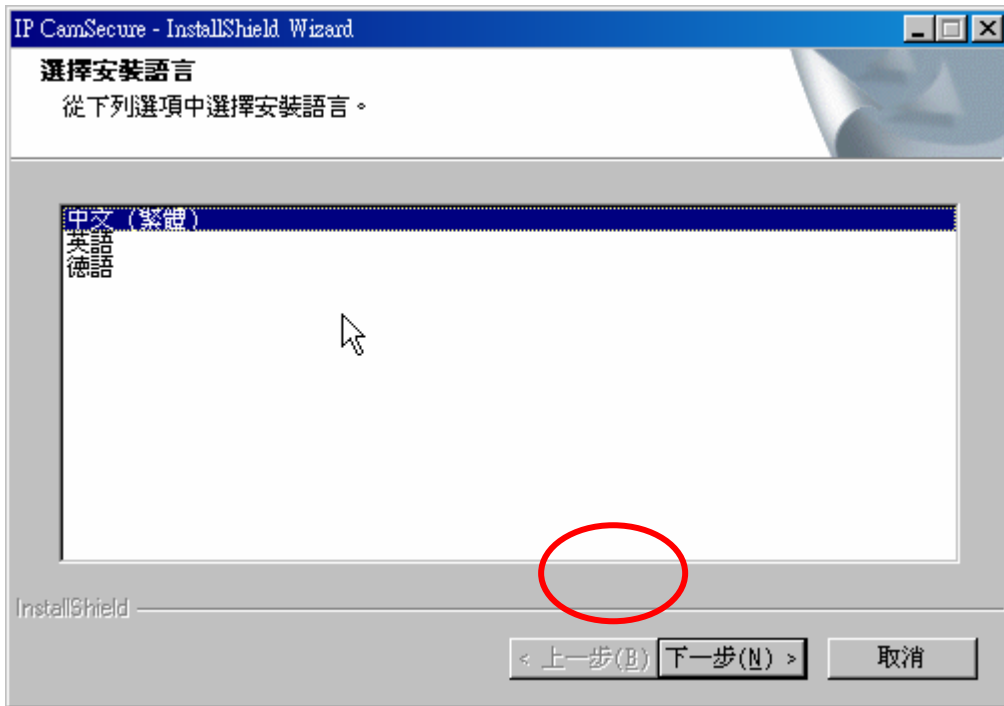


Click “Next”.

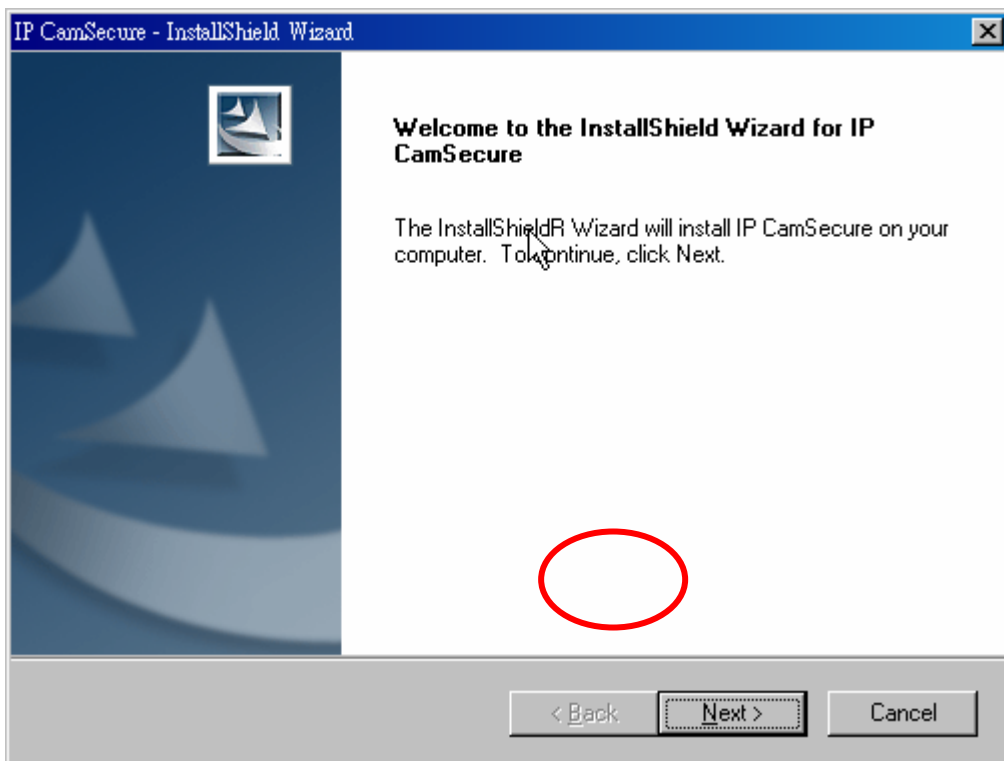


Click On I accept the terms and license agreement, click “Next”.

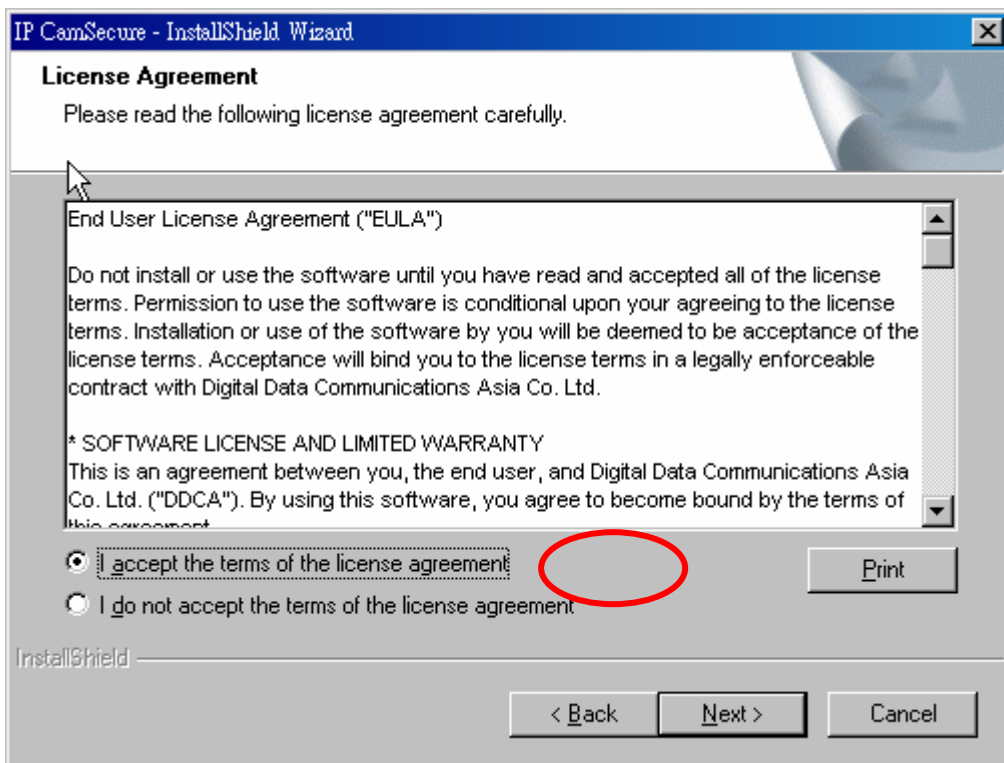


Please enter User Name and Company Name.

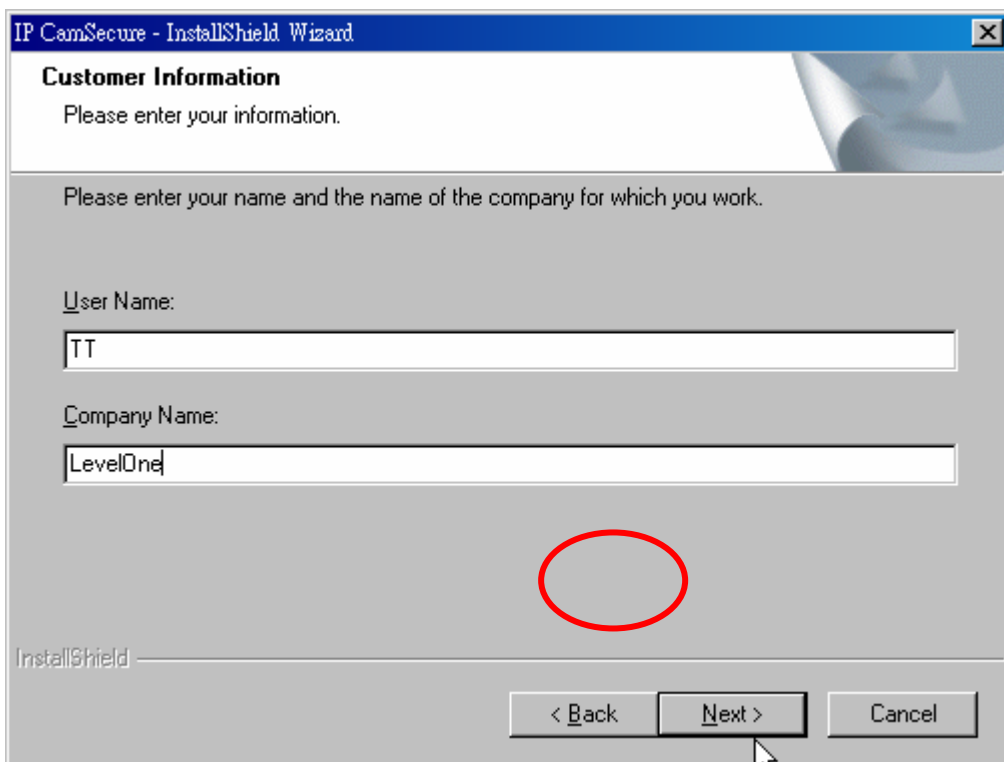


Choose Complete Install. "Next".

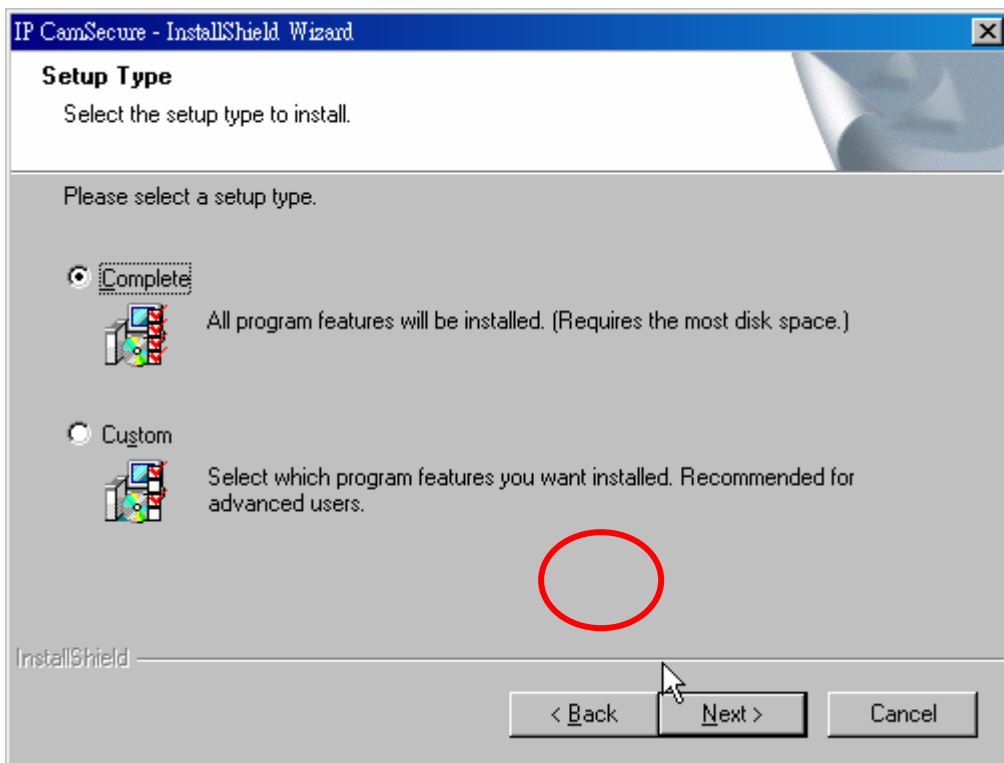


Click on "Install".

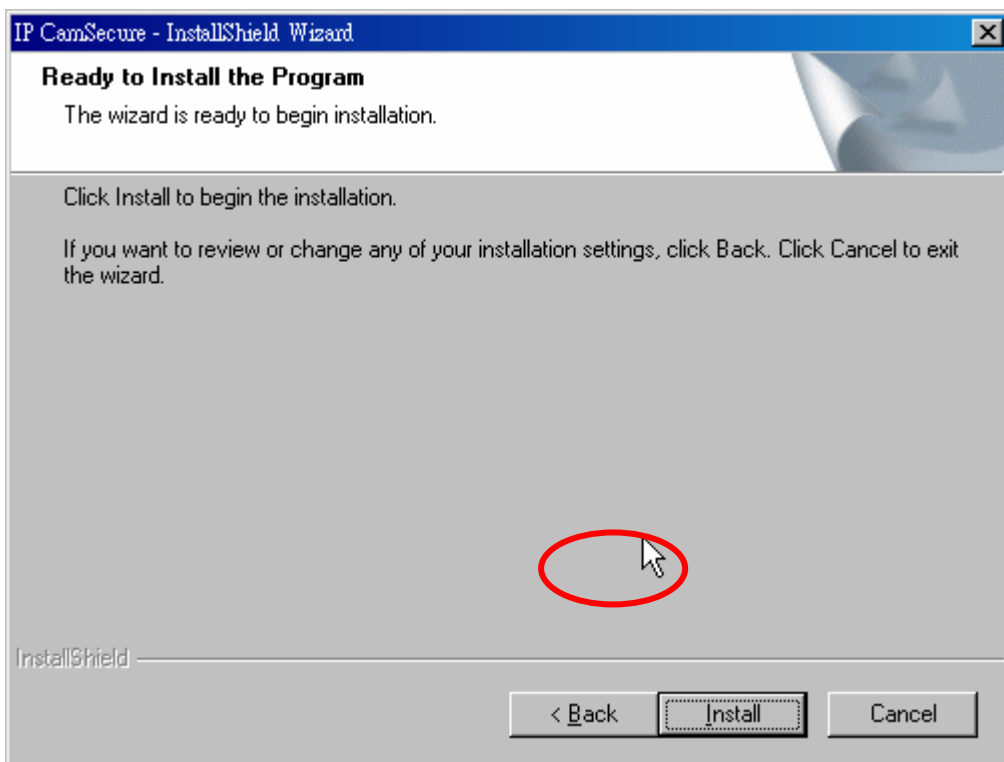

Click "Finish" to complete Installation.

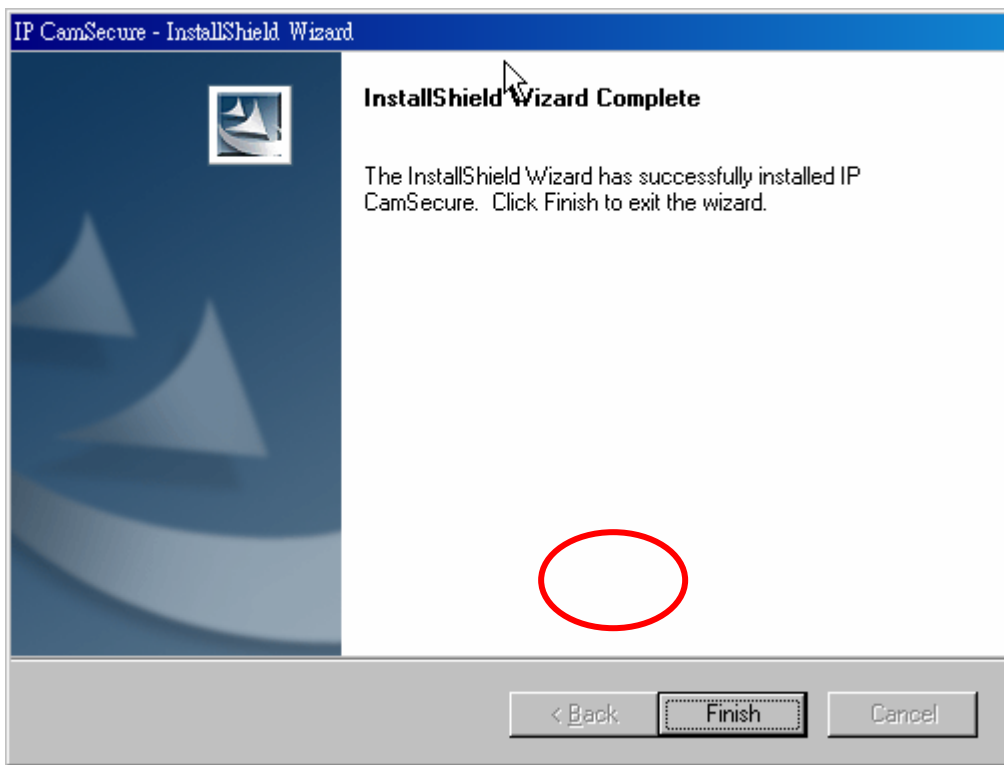


Start – Program – LevelOne - IP CamSecure - Main Console.

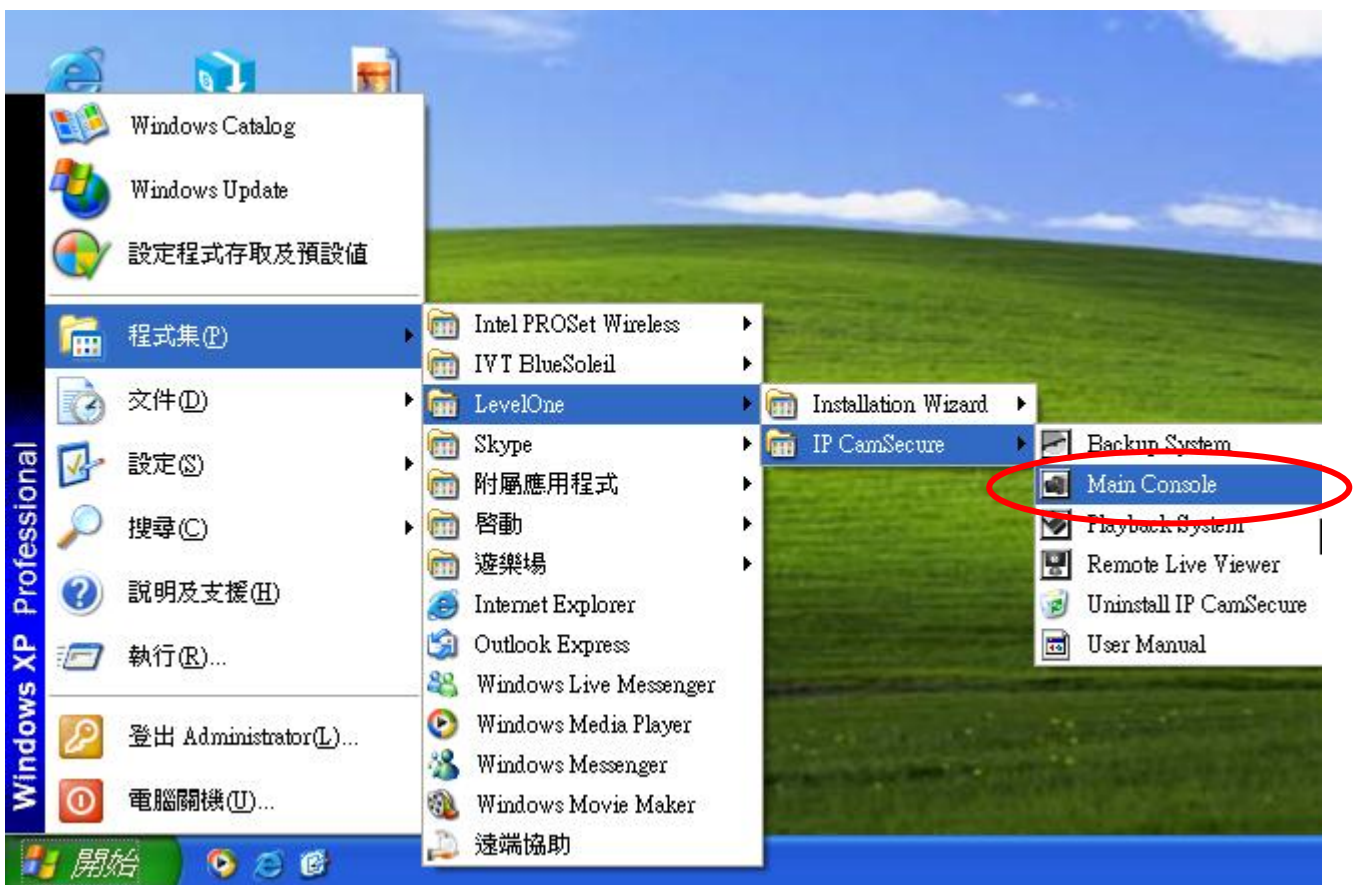


Please enter the password and remember it.



Click on Config – Setting.

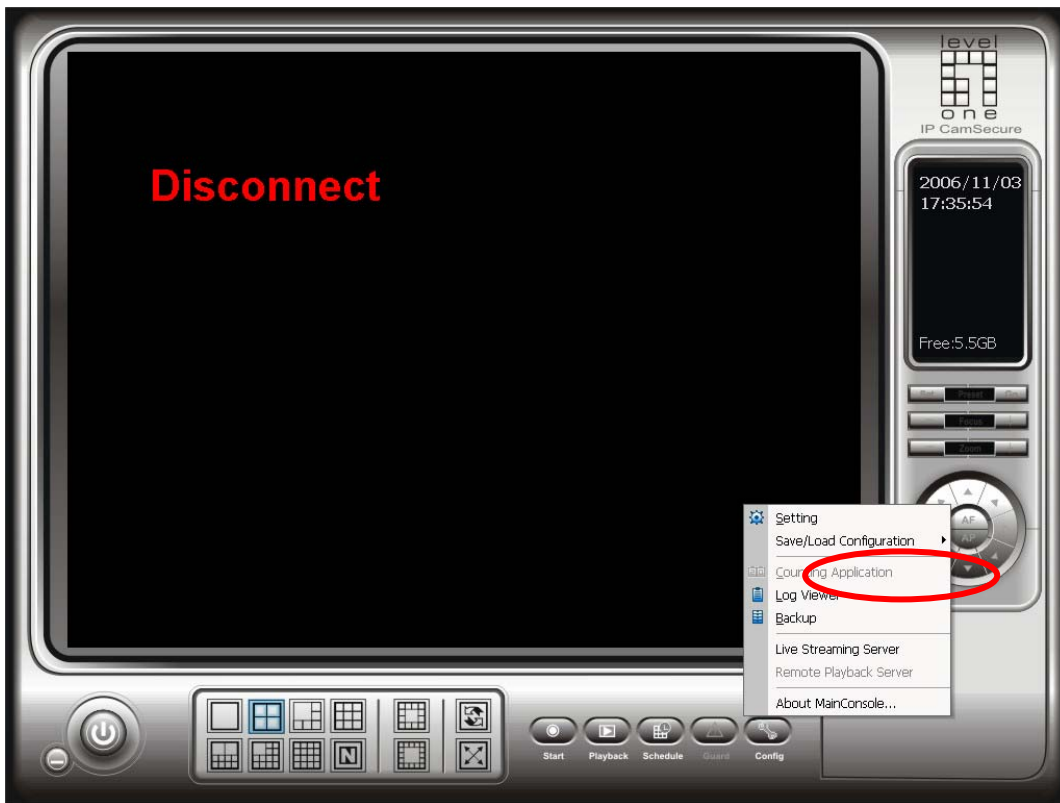


Click on Camera Tab,, Insert.

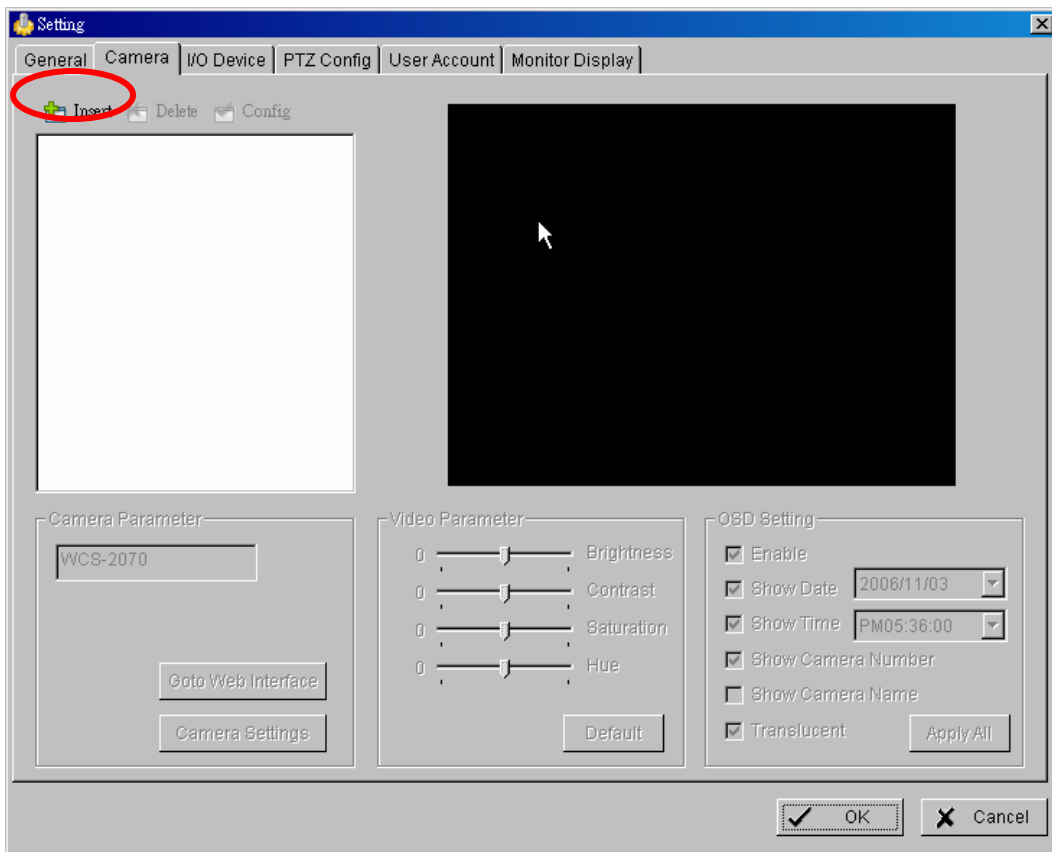

Enter the IP address or DDNS of your IP camera, then user name and password. Click on “Auto Detect”.

Click on OK when finishing Auto Detect.

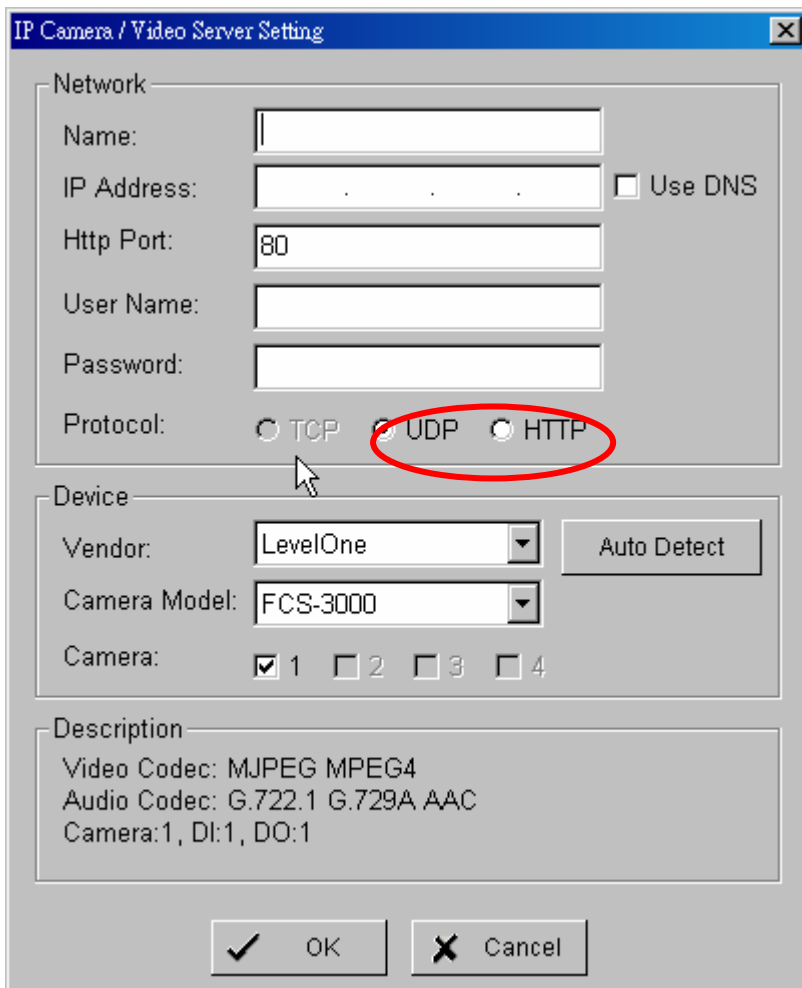

Complete.



IPCam Secure can support up to **32 Channels**.

